

King Cable™


Features:

- must be installed in the extended position (no slack)
- cable reaches across hose fittings to provide standby safety for hose
- spring-loaded loops in the cable ends open easily to pass over the couplings for a firm grip on the hose
- no tools needed - easy to install and remove
- cables shipped with safety restraint labels attached
- highly resistant to rust and corrosion
- hose-to-hose or hose-to-rigid outlet
- maximum operating pressure: **200 PSI**
- minimizes damage to equipment and injuries to operators in the event hose, couplings or clamps fail, or there is an accidental separation of the assembly



Materials:

- For WB1, WB3, WA2, WA4, WSR1, WSR3, WSR2, WSR4, WSR1C, WB1C, WSR1E:
  - wire rope: galvanized carbon steel
  - ferrules: aluminum
  - springs: galvanized carbon steel
- For WB1SS, WA2SS, WSR1SS, WSR2SS:
  - wire rope: 304 stainless steel
  - ferrules: copper
  - springs: 304 stainless steel
- For WA2B:
  - wire rope: galvanized carbon steel
  - ferrules: copper
  - springs: galvanized carbon steel

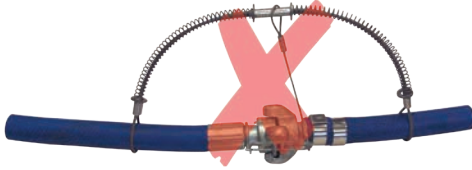

incorrect installation



correct installation

Hose-to-Tool Service



hose end

tool end

Hose ID	Cable	Length	Maximum Working Pressure (PSI)	Steel Part #	Stainless Steel Part #
1/2" - 1 1/4"	1/8"	20 1/4"	200	<b>WSR1</b>	<b>WSR1SS</b>
1/2" - 2"	3/16"	28"	200	<b>WSR3</b>	---
1 1/2" - 3"	1/4"	38"	200	<b>WSR2</b>	<b>WSR2SS</b>
4"	3/8"	44"	200	<b>WSR4</b>	---

Hose-to-Hose Service



hose end

hose end

Hose ID	Cable	Length	Maximum Working Pressure (PSI)	Steel Part #	Stainless Steel Part #
1/2" - 1 1/4"	1/8"	20 1/4"	200	<b>WB1</b>	<b>WB1SS</b>
1/2" - 2"	3/16"	28"	200	<b>WB3</b>	---
1 1/2" - 3"	1/4"	38"	200	<b>WA2</b>	<b>WA2SS</b>
4"	3/8"	44"	200	<b>WA4</b>	---

King Cable™ Options



WB1C - WB1 with safety clip and lanyard



WSR1E - WSR1E with stainless steel marine eye

Hose ID	Cable	Part #	Description	Max. Work. Press. PSI
1/2" - 1 1/4"	1/8"	<b>WSR1C</b>	WSR1 with safety clip and lanyard used to lock Air King™ couplings	200
1/2" - 1 1/4"	1/8"	<b>WB1C</b>	WB1 with safety clip and lanyard used to lock Air King™ couplings	200
1/2" - 1 1/4"	1/8"	<b>WSR1E</b>	WSR1 with stainless steel safety marine eye used to connect safety cable to a bolt on tool	200
1 1/2" - 3"	1/4"	<b>WA2B</b>	WA2 with bronze/copper ferrule for special environmental conditions	200